


The Compsee Twin Client Terminal Emulation Software provides a simple, low-cost solution for wireless connectivity to any TCP/IP telnet-capable host application. The Twin Client gives you direct access to your legacy applications via TN-5250/3270, VT100/220 and HP700/92 terminal emulation.


Because the Compsee Twin Client requires no Network Control Unit (NCU) or Server this solution is ideal for sites such as small warehouses or manufacturing sites that only require a small number of RF terminals. And, your investment is protected because, should your wireless application ever change or grow, a network controller can be conveniently added without requiring any new software for your terminals.

The terminal software is easily switched from "Thick Mode" (no server) to "Thin Mode" (server mode) using simple set-up selections on the Apex III terminal. Twin Client's unique ability to "grow with the application" provides a flexible and cost-effective means to quickly bring-up wireless applications without large programming overhead. No other terminal emulation product can guarantee this easy, low-risk migration path.

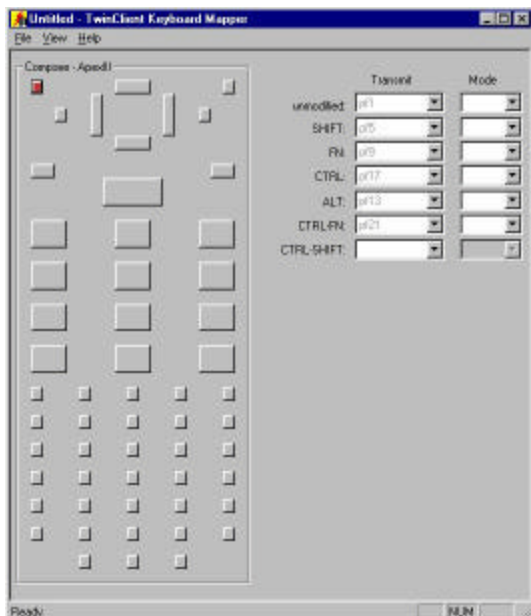

Twin Client Manager

A Perfect Way to Move Up to Wireless!

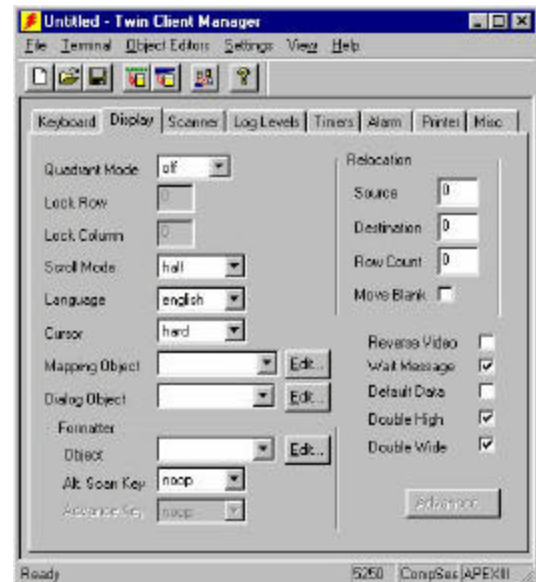


Compsee Twin Client is feature-rich and easy to use - allowing the user to quickly customize Apex III Portable Data Terminal RF functionality to suit their specific application needs. Functions such as keyboard mapping, and automated login scripts are quickly and easily customized with Compsee Twin Client.

The Apex III has one of the most capable LCD's in its class. The Twin Client can take advantage of the Apex III's unique 20Rx30C LCD by allowing the user to manipulate screen formatting. This allows the Apex III to properly resize and display Fields and Prompts from an 80 x 24 column terminal screen on the Apex III LCD. Double high and/or double wide characters sizes can be easily selected to provide for optimum readability. Reversed video can also be effortlessly selected in the handy Display Menu.

Compsee Twin Client software enables you to connect easily to a wide variety of host systems using Telnet and TCP/IP protocols. Simply select the various configuration options from pull down menus for your application, download the configuration files to the Apex III and then set the host and client IP addresses, and you're ready to communicate. The Twin Client also provides a convenient Twin Client Wizard that can be used to help guide you through the most common settings required to setup your Terminal Emulation Environment.

Compsee Twin Client provides terminal emulation connectivity via any of the wireless LAN backbones supported by Compsee's Apex III. Presently supported backbones include Symbol Technologies™, Cisco™, Lucent Technologies™, and Proxim™.

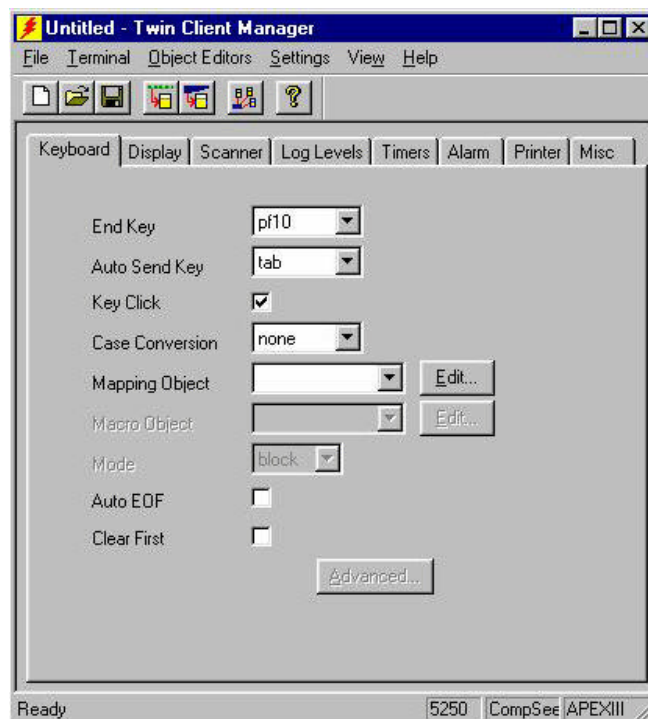

If you wish, Compsee can factory pre-load your terminals for your convenience.

In the event your wireless data-collection application grows, Compsee Twin Client provides an upgrade path to server-based systems from wireless-connectivity leader Connect, Incorporated. Compsee Twin Client includes client program, which allows the use of wireless Apex III terminals with Connect/IX and Connect/NT wireless network controllers. These controllers support all the same features as Compsee Twin Client, as well as provide wireless network traffic optimization, multiple hotkey sessions, network management and diagnostics, network gateway functions, firewalling, and fault resilience.

For Sales Information call or write:



01/02

COMPSEE, Inc. • 2500 Port Malabar Blvd. • Palm Bay, FL 32905
Toll-free 800.628.3888 • Phone 321.724.4321 • Fax 321.723.2895
Email sales@compsee.com • www.compsee.com

Windows is a registered trademark of Microsoft Corporation. Other products are trademarks or registered trademarks of their respective companies.

In a continuing effort to improve our products, Compsee, Inc. reserves the right to change specifications and features without prior notice.